

## VP 70/90

### features and technology




### Technical Highlights

- Optimization of lighting and shading as slats can tilt in any position based on the sun's angle
- Ideal solution in managing thermal gain and glare while providing natural daylight
- They can be retracted when shading is not required
- Optional perforated slats which allow and maintain exterior views when the blinds are fully closed
- Wide selection of slat finishes to compliment any architectural detail
- Integration of intelligent controls makes the VP 70/90 an effective solution and contributes to the development of Dynamic Façade
- Privacy protection when required
- Safety standards according to EN13659



The slat sizes are available in 70mm (3 5/8"), 90mm (4 1/2"). The slats can be solid or perforated based on preference and criteria.

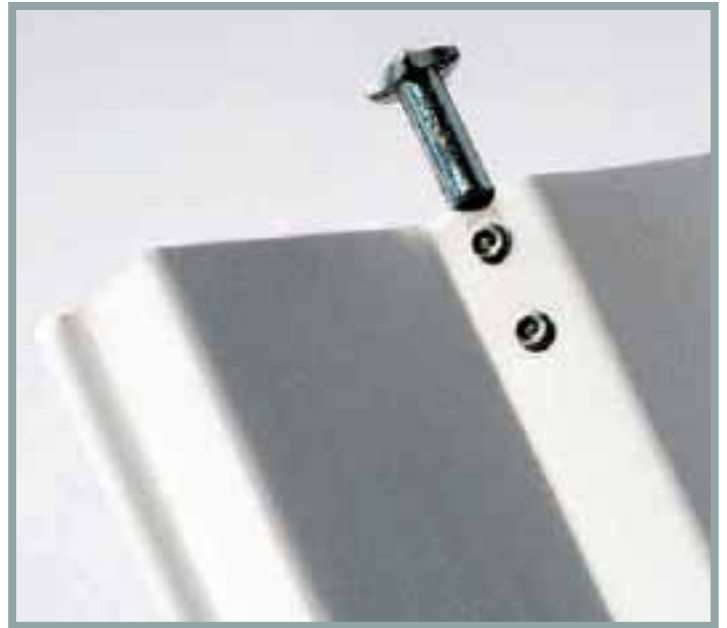

Reinforced aluminum end pins allows for superior strength and durability against any exterior elements.



Contoured z-shaped slats offer superior strength, tight closure and the higher degree of light penetration in the open position for maximum daylighting.



- Automated process of attachment assures extra strength and durability.
- Carbon fibre braided cord is designed for exterior use.